



PD.186/2

SUB BASS DRIVER

UK 'HERITAGE' LINE

18" / 460 mm

NOMINAL DIAMETER

700 W (A.E.S.)

POWER HANDLING

95 dB

SENSITIVITY (1W/ 1m)

30 Hz - 2 kHz

FREQUENCY RESPONSE

5.0" / 127 mm

VOICE COIL DIAMETER

10.5 mm Xmax


MAXIMUM LINEAR EXCURSION



FEATURES:

- Heavy-duty cast aluminium chassis for increased rigidity.
- Double suspension system.
- Effective transducer in a variety of versatile applications.
- Suitable for horn loaded or reflex designs.

FREQUENCY RESPONSE AND IMPEDANCE CHART

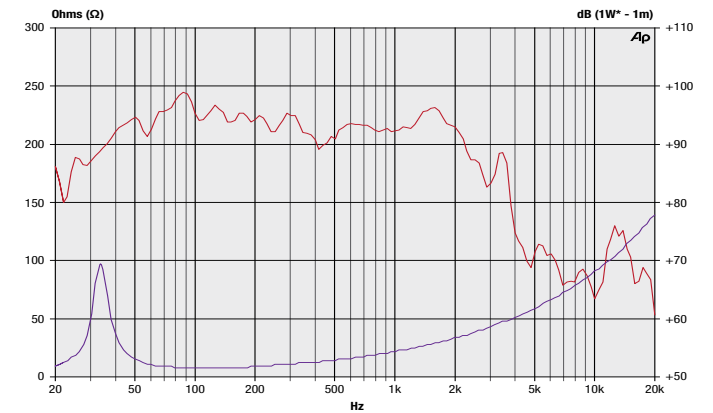

*2.83V. Half space response measured in a 975 Litre sealed enclosure.

SPECIFICATIONS

Nominal Diameter	18" / 457.2 mm
Voice Coil Diameter	5.0" / 127 mm
Available Impedances	4 Ohms/ 8 Ohms/ 16 Ohms
Power Rating	700 W (A.E.S.)
Peak Power (6dB Crest Factor)	2800 W (A.E.S.)
Sensitivity (1w - 1m)	95 dB
Frequency Range	30 Hz - 2 kHz
Recommended Enclosure Volume	100 - 350 Litres
Resonance	34.18 Hz
Voice Coil Winding Depth	25 mm / 0.98"
Magnet Gap Depth	9 mm / 0.35"
Flux Density	0.95 Tesla
Magnet Material	Ceramic
Voice Coil Material	Copper
Former Material	Glass Fibre
Dust Dome Material	Paper
Suspension Material	Dual Fabric
Cone / Surround Material	Paper / Fabric

THIELE SMALL PARAMETERS (8Ω MODEL)

Fs	34.18 Hz	Vas	192.15 litres
Re	6.19 Ω	Mms	203.93 g
Qms	10.77	Sd	1134.11 cm ²
Qes	0.55	Cms	106.67 μm/N
Qts	0.52	BL	22.18 T/m
Le	1.95 mH	Xmax	10.5 mm
L2	3.06 mH	Vd	1.2 litres
R2	8.07 Ω	Ref. Efficiency	2.05 %

*1 Power compression is the reduction of sensitivity at the specified power. Higher power ratings do not necessarily give a proportionate increase in SPL therefore the maximum SPL of the driver may significantly exceed that of other manufacturers with high power ratings.

1. A.E.S. Standard (40 to 400 Hz). Program 1400 Watts.
2. A.E.S. Recommended Practice.
3. Thiele - Small Parameters follow a 700 Watt A.E.S. preconditioning period.

Please note that frequency response measurements are supplied for comparison purposes only and are not a measure of the low frequency performance which may be achievable in a fully optimised system.

DIMENSIONS

Overall Diameter	474 mm
Width Across Flats	459 mm
Flange Height	14.5 mm
Depth (Excl. Flange)	173 mm
Magnet Diameter	220 mm

MOUNTING INFORMATION

Chassis Shoulder Diameter	414.5 mm
Outer Bolt Circle	6x M8 on 455 mm PCD
Inner Bolt Circle	N/A

WEIGHT

Nett Weight	14.9 kg / 32.85 lb.
Shipping Weight	16.4 kg / 36.16 lb.